

CUSTOM ROTARY SCREW COMPRESSOR SOLUTIONS FOR YOUR APPLICATION



BENEFITS



Compact Size

Built to fit in tight spaces. 12% smaller than competitive products.
771 in³ (12.6 L) vs. competitor's 877 in³ (14.4 L)



100% Duty Cycle

20 - 70 CFM. 100% of the time.



Lightweight, Aluminum Design

44% weight savings compared to competitive products.
38 lb (17.3 kg) vs. competitor's 68 lb (31 kg)



SAE PTO Port Driven

SAE A & C port/spline configurations available.







6X More Output

In a package that is smaller and lighter than leading reciprocating competitors.



Engineered & Manufactured With Precision In Canada

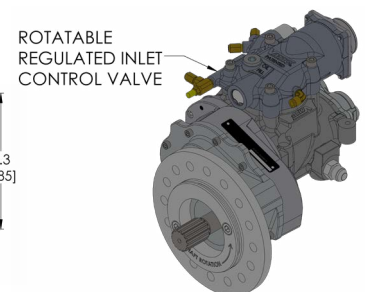


TECHNICAL SPECIFICATIONS

Minimum Working Pressure	90 psi	6.2 bar
Maximum Working Pressure	175 psi	12.0 bar
Maximum CFM*	70 CFM	1,982 l/min
Compressor Weight	38 lb	17.3 kg
Rotation	Counterclockwise	
Maximum Clutch Speed	2,600 RPM	

*Using ASME PTC 19.5 - 2004 flow measurement standard at 100 psi

FLOW RATE

*Actual measured output

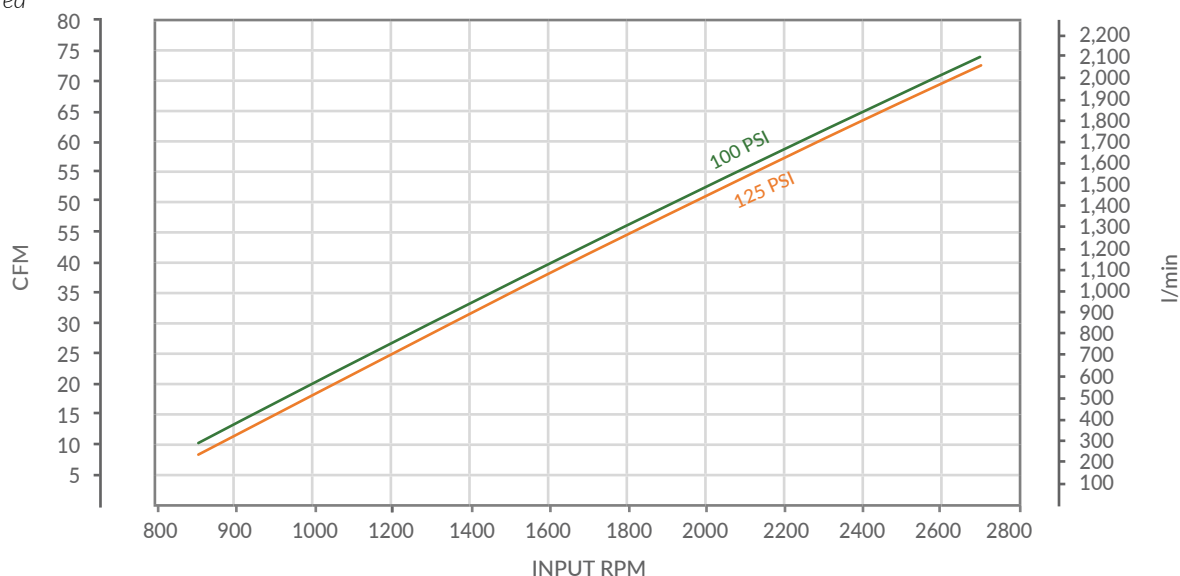

POWER/TORQUE - RPM

*Actual measured output

